

# VULCASEAL<sup>®</sup>

## V250



**POWERFUL AEROSOL GROUT SEALER PROVIDING AN INSTANT 20 YEAR STAIN PROTECTION. EASY SPRAY-ON APPLICATION CAN BE APPLIED IMMEDIATELY AFTER GROUTING.**

### PRODUCT DESCRIPTION

**Vulcaseal V250** penetrates into absorbent wall and floor grout joints. This process fills the pores and capillaries of the grout with an invisible film of polymers. This process alters the surface tension, creating a repelling effect. This treatment prevents the immediate penetration of water based dirt, oil and grease.

**Vulcaseal V250** provides an effective protection against staining. Expected durability, can be up to 20 years dependant on the type of surface and use of the treated material, ie vertical surfaces will have extended longevity, whereas floor grout joints will wear and have variable results. It is advised to avoid common off-the-shelf household cleaning products, as these can contain harmful caustics and bleaches, which in turn will affect the performance and longevity.

### CHARACTERISTICS

**Can be applied immediately after grouting**

**Does not alter the aesthetics or nature of the substrate**

**Suitable for wall & floor grout**

### APPLICATION

A trial should always first be tested on a small area to confirm the products suitability for the surface being treated.

We recommend wearing a respirator, gloves and safety goggles during application.

# VULCASEAL<sup>®</sup>

## V250



### IMPORTANT

We recommend wearing a respirator, gloves and safety goggles during application.

Always carry out a test first to ensure the finished result is acceptable.



### STEP 1

Ensure the surface to be treated is clean, dust-free and dry before application.




### STEP 2

Shake the can well. Make sure spray is used in a well ventilated area. Open windows and use fans to circulate air.




### STEP 3

Spray 10-16 inches / 25-40cm from the surface. Apply the product evenly. Wipe off excess if spraying vertical areas.

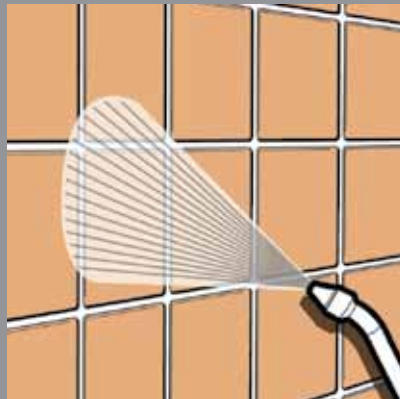

### STEP 4

Test area after application by using water droplets, if droplets are absorbed, a second or third coat maybe required.

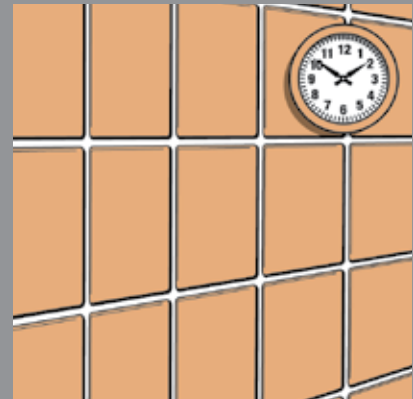

### STEP 5

After testing leave to dry. Dry within 1 hour, fully cured within 24 hours.

### COVERAGE

Coverage depends on the porosity of the material. The figures indicated are approximate and should be used only as a general guideline: **500ml = 5 - 20m<sup>2</sup>**.

### STORAGE

Lifespan: 5 years. Ideal storage is closed, dry and frost free conditions. Opened or used containers should be used up without delay.

### TOOLS REQUIRED



Low Pressure Washer



Dogtooth Brush